

# 0.68" 96x32 OLED SPI OLED SH1106G OLED



## PRODUCT INFORMATION

O L E D L C D D I S P L A Y

Item	0.68" 96x32 OLED SPI OLED SH1106G OLED		
Item	0.68" OLED	Resolution	96X32
Item	Pixel	Pixel Pitch	2000P1
Item	19.25 x 20.86 x 1.28mm	Module Size (HxV)	16.30 x 5.42mm
Item	0.15mm x 0.15mm	Interface	I2C 4 SPI 16
Item	-40°C ~ 70°C	Brightness	150cd / sq
Item	SH1106G	Current	10mA @ 3.0V

\* KWH0068UX01 0.68" 96x32 SPI OLED

\* Item

1. Item

2. Item

3. Item 2000P1

4. Item / Item

5. Item 160mm

6. Item -40°C ~ 85°C

7. Item 99.9mW

8. Item 10µS

\* Item 150 ~ 1500cd / m²


\* Item

\* Item RoHS REACH

\* Item

# PRODUCT DISPLAY

O L E D   L C D   D I S P L A Y

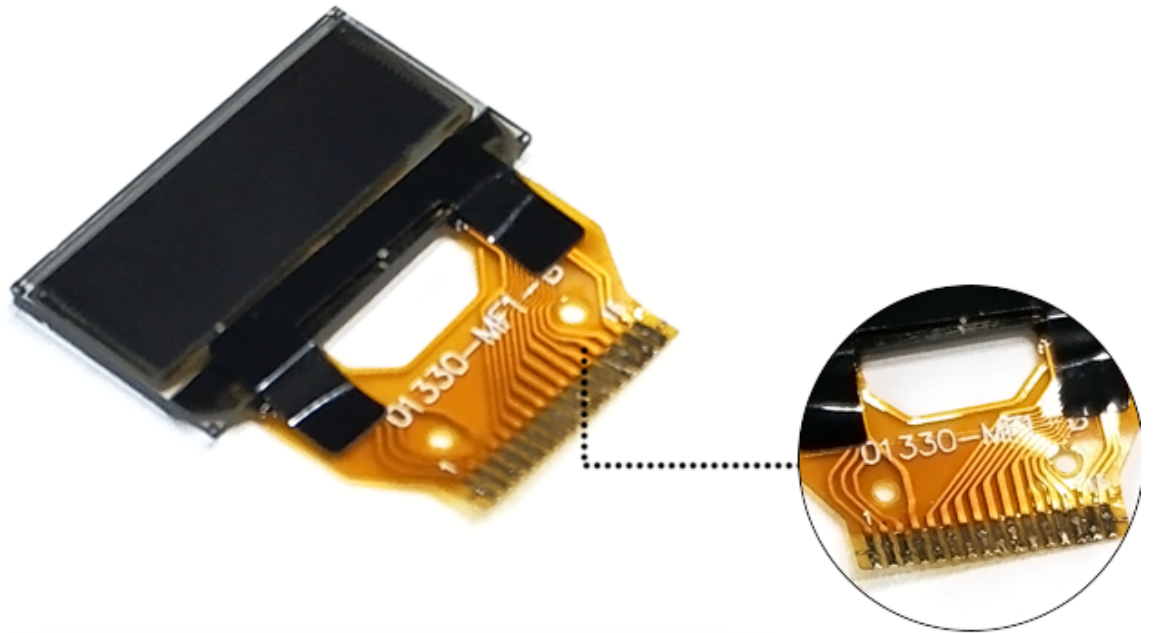

O L E D   L C D   D I S P L A Y

## PRODUCT DETAILS



- High contrast reaches to 2000:1
- With SH1106G IC & White Display Color
- 16 Pin FPC I2C 4-wire SPI Interface
- Good resolution with 96x32
- 0.68" Mini Size Monochrome OLED Display Module
- Support OEM & ODM Service

# APPLICATION

OLED LCD DISPLAY



01 Civilian equipment



02 Office tools



03 Traffic instrument



04 Mini screen



05 Medical and beauty equipment



06 Smart device



07 Automation



08 Control system