


# 1602 LCD 16x2

<b>LCD</b>	1602 LCD 16x2		
<b>Character</b>	16 Character * 2	<b>Display</b>	STN
<b>LCD</b>		<b>Display</b>	
<b>Dimensions</b>	122.0mm w x 44.0mm h x 13.5mm t	<b>Dimensions</b>	99.0mm w x 24.0mm h
<b>IC</b>	ST7066U-0A	<b>IC</b>	16
<b>IC</b>	6	<b>IC</b>	MPU.
<b>IC</b>		<b>IC</b>	1/16 1/5
<b>Temperature</b>	0°C + 50°C	<b>Temperature</b>	-20°C + 70°C



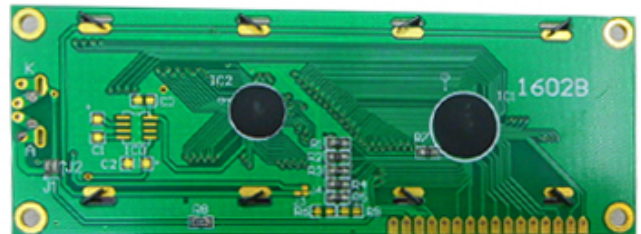

- 16x2
- STN
- COB
- Character
- Transmissive & Negative

