


1x16 LCD COB 1601 LCD STN 16 * 1 LCD

| | | | |
|-------------|--------------------------------------|-------------|--------------------------|
| LCD | 1x16 LCD COB 1601 LCD STN 16 * 1 LCD | | |
| Character | 16 character * 1 | STN | STN |
| LCD | COB | STN | STN |
| Dimensions | 122.0w x 33.0h x 8.8t mm | Dimensions | 99.0min w x 13.0min h mm |
| IC | ST7066U-0A | IC | 16 |
| MPU | 6 | MPU | MPU. |
| Resolution | 16 | Resolution | 1/16 1/5 |
| Temperature | 0°C + 50°C | Temperature | -20°C + 70°C |



- 16x1
- STN
- COB
- Character
- Transmissive & Negative

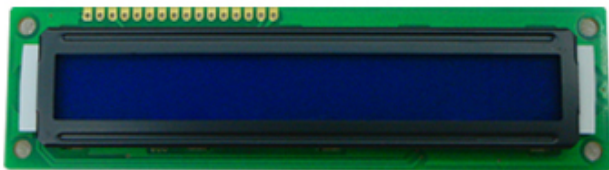