

0,42 palcový OLED displej 72x40 Micro OLED modul s integrovaným ovladačem SSD1306B

Small OLED Display Support OEM & ODM Service

- * Low power consumption reaches to 2uA-20uA depending on the size;
- * Thinner, lighter and durable;
- * Full viewing angle;
- * High contrast ratio is up to 2000:1;
- * With fast response time down to 10μs;
- * Best driving voltage control is as low as 3-9V.




Specification

název	0,42 palcový OLED displej 72x40 Micro OLED modul s integrovaným ovladačem SSD1306B		
Velikost modulu	0,42 palcový OLED modul	Matice Dox	72x40 pixelů
Barva displeje	Monochromatický OLED	Kontrastní poměr tmavé místnosti	2000: 1
Obrysová dimenze	12,00 x 23,50 x 1,38 mm	Aktivní plocha (HxV mm)	9,196 x 5,180 mm
Doba odezvy	10 μs	Rozhraní	I2C, 15pin
Drive Duty	Povinnost 1/40	Jas	430 cd / m2
Ovladač IC	SSD1306B	Napájecí proud / napětí	24mA, 3,0V
Úhel pohledu	> 160 stupňů	Dot Pitch	0,128 x 0,13 (mm)
Provozní teplota	-40 °C ~ 70 °C	Úložný prostor Teplota	-40 °C ~ 85 °C


- * KWH0042UX03 je pasivní maticový malý OLED displej.
- * Skládá se z OLED panelu, IC ovladače, FPC.
- * Jedná se o 72x40 pixelů OLED modul.
- * Lze navrhnout a přizpůsobit konkrétní dotykový panel.
- * Vyhovuje směrnici RoHS a REACH.
- * Pokud nemůžete najít vhodný, kontaktujte nás a vyžádejte si doporučení.

Product Details

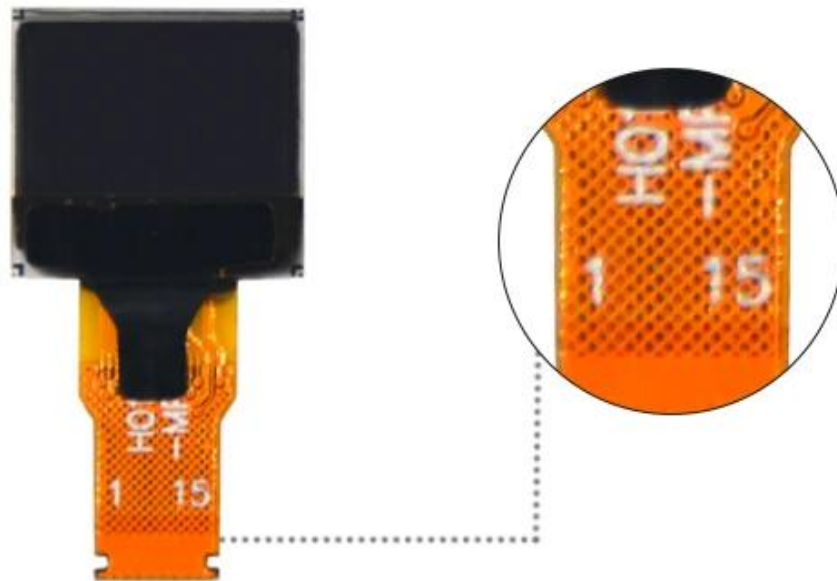

Industrial Excellent Quality

Superior performance in display contrast ratio,
Luminous efficiency, power consumption
And response time. RoHS Compliant and
With strict production quality control.

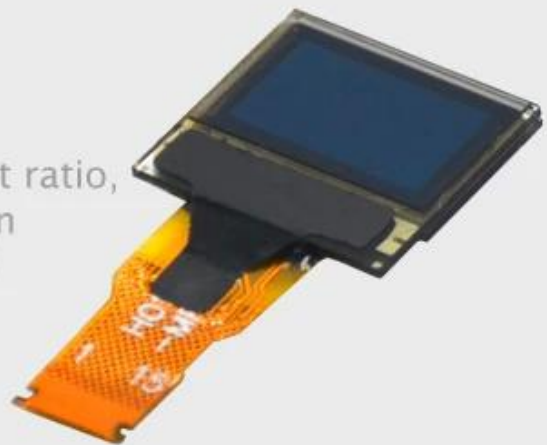

Competitive Price & Customization Solution

Low cost mass production, with attractive price.


Provide you technical service by

Fully experienced engineers.

Support OEM & ODM service.



- * 0.42 Inch 72x40 OLED display
- * White light monochrome PM OLED
- * With 15 pin Soldering FPC
- * With I2C Interface and SSD1306B IC
- * Support OEM & ODM service

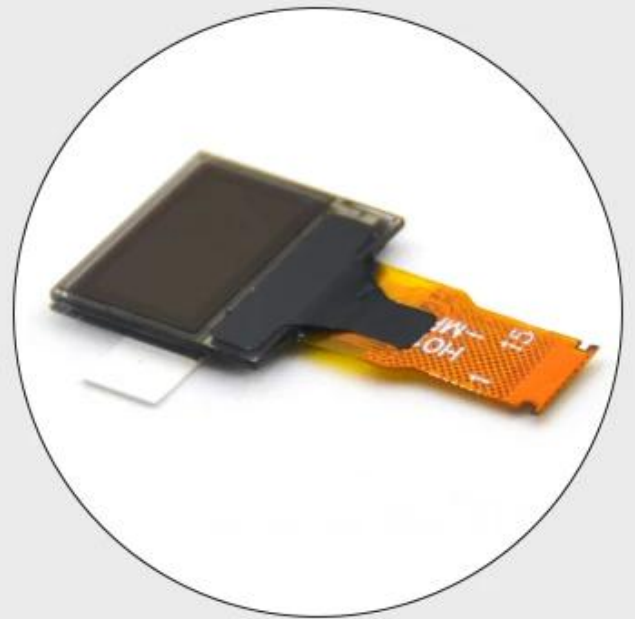

Application

