

Displej OLED 0,42 palce 72x40 Micro OLED modul s ovladačem SSD1306b IC

Small OLED Display Support OEM & ODM Service

- * Low power consumption reaches to 2uA-20uA depending on the size;
- * Thinner, lighter and durable;
- * Full viewing angle;
- * High contrast ratio is up to 2000:1;
- * With fast response time down to 10μs;
- * Best driving voltage control is as low as 3-9V.




Specification

Jméno	Displej OLED 0,42 palce 72x40 Micro OLED modul s ovladačem SSD1306B IC		
Velikost modulu	OLED modul 0,42 palce	Matrix dox	72x40 pixel
Zobrazit barvu	Monochromatický OLED	Poměr kontrastu tmavého pokoje	2000: 1
Obrys dimenze	12,00 x 23,50 x 1,38 mm	Aktivní plocha (HXV MM)	9,196 x 5,180 mm
Doba odezvy	10 μs	Rozhraní	I2C, 15Pin
Drive Duty	1/40 povinnost	Jas	430CD/M2
IC ovladač	SSD1306B	Například proud/napětí	24 mA, 3,0V
Zobrazení úhlu	>160 Degree	Dot Pitch	0,128x0,13 (mm)
Provozní teplota	-40 °C ~ 70 °C	Skladování Teplota	-40 °C ~ 85 °C


- * KWH0042AB01 je pasivní matice malý OLED displej.
- * Skládá se z OLED panelu, ovladače IC, FPC.
- * Je to modul OLED 72x40 pixelů.
- * Konkrétní dotykový panel lze navrhnout a přizpůsobit.
- * Rohs & Reach Compliant.
- * Pokud můžete najít vhodné, kontaktujte nás a získáte doporučení.

Product Details

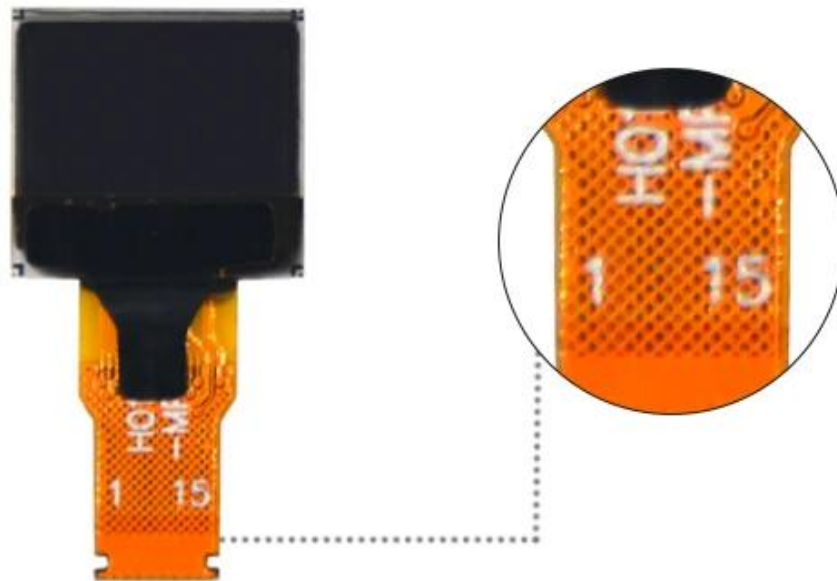

Industrial Excellent Quality

Superior performance in display contrast ratio,
Luminous efficiency, power consumption
And response time. RoHS Compliant and
With strict production quality control.

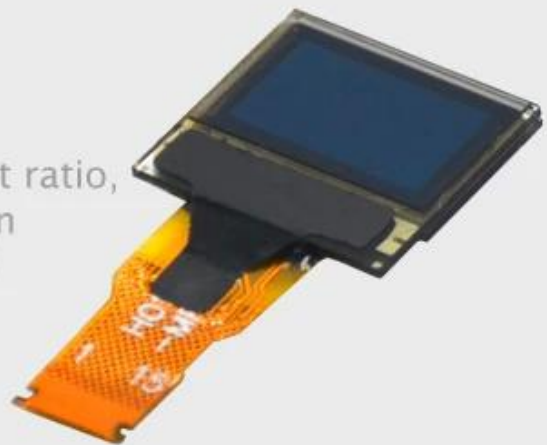

Competitive Price & Customization Solution

Low cost mass production, with attractive price.


Provide you technical service by

Fully experienced engineers.

Support OEM & ODM service.



- * 0.42 Inch 72x40 OLED display
- * White light monochrome PM OLED
- * With 15 pin Soldering FPC
- * With I2C Interface and SSD1306B IC
- * Support OEM & ODM service

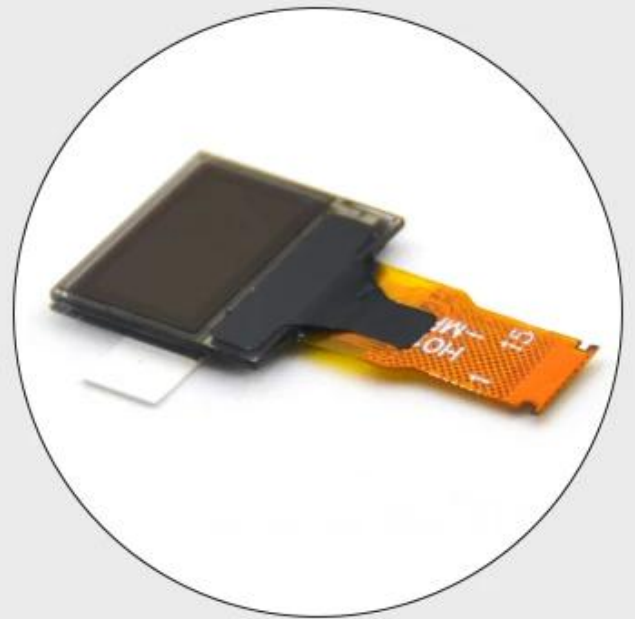

Application

