

128x64 OLED SCREEN Modul 2,42 palce OLED displej SSD1309

OLED Display

Support OEM & ODM Service

- * Low power consumption reaches to 2uA-20uA depending on the size;
- * Thinner, lighter and durable;
- * Full viewing angle;
- * High contrast ratio is up to 10000:1;
- * With fast response time down to 10μs;
- * Best driving voltage control is as low as 3-9V.



Specification

název	128x64 OLED SCREEN Modul 2,42 palce OLED displej SSD1309		
Velikost modulu.	2,42 palce oled modul	DOX MATRIX.	128x64 usnesení
Zobrazit barvu	Monochromatický (bílé nebo žluté světlo)	Kontrastní poměr tmavého pokoje	10000: 1.
Obrys dimenze	60,50 x 37,00 x 2,00 mm	Aktivní oblast (HXV mm)	55,01 x 27,49 mm.
Doba odezvy	10 μs.	Rozhraní	SPI, I2C, 24pin
Drive Duty.	1/64 Duty.	Jas	80CD / m2.
IC Driver.	SSD1309.	Napájecí proud / napětí	180mA, 2.8v.
Úhel pohledu	Volný, uvolnit	Rozlišení Rozlišení	0,43x0,43 (mm)
Provozní teplota	-40 ~ 70 °C	Skladovací teplota	-40 ~ 85 °C

* KWh0242UL01 je pasivní matrice monochromatický bílý (volitelný modrý světelný) oled displej.

* Skládá se z monochromatického OLCD panelu, ovladače IC, FPC.


* Je to modul 88x64 rozlišení.

* Specifický dotykový panel lze navrhnout a přizpůsobit.

* RoHS & REACH kompatibilní.

* Pokud nemůžete najít vhodnou, kontaktujte nás, abyste získali doporučení.

Product Details

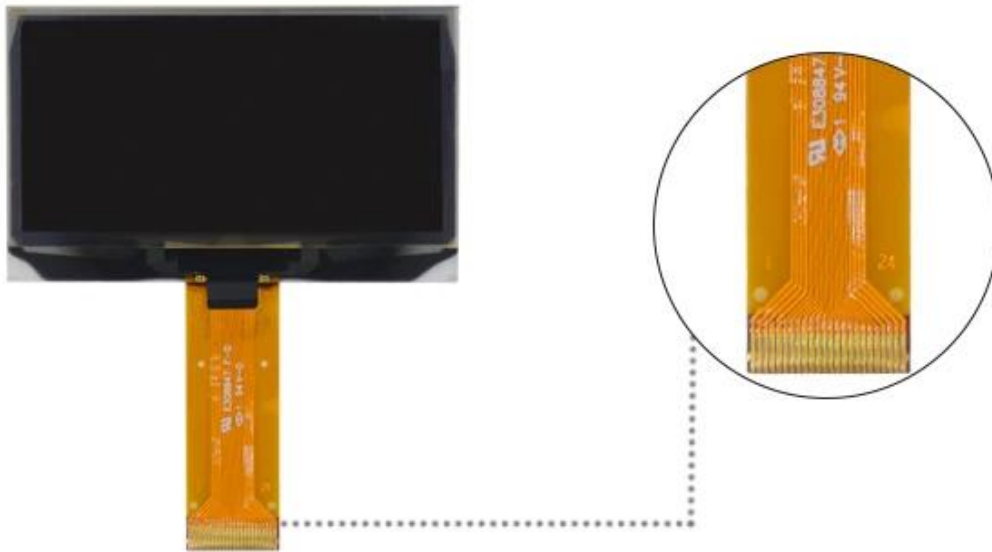

Industrial Excellent Quality

Superior performance in display contrast ratio,
Luminous efficiency, power consumption
And response time. RoHS Compliant and
With strict production quality control.



Competitive Price & Customization Solution

Low cost mass production, with attractive price.

Provide you technical service by

Fully experienced engineers.

Support OEM & ODM service.



- * 2.42 Inch 128x64 OLED display
- * White light (or yellow) mono PM OLED
- * With 24 pin Soldering FPC
- * With 4-wire SPI & I2C in Parallel
- * Support OEM & ODM service



Application

