

0,42 Zoll OLED -Anzeige 72x40 Micro OLED -Modul mit SSD1306B -Treiber -IC

Small OLED Display Support OEM & ODM Service

- * Low power consumption reaches to 2uA-20uA depending on the size;
- * Thinner, lighter and durable;
- * Full viewing angle;
- * High contrast ratio is up to 2000:1;
- * With fast response time down to 10µs;
- * Best driving voltage control is as low as 3-9V.




Specification

Name	0,42 Zoll OLED -Anzeige 72x40 Micro OLED -Modul mit SSD1306B -Treiber -IC		
Modulgröße	0,42 Zoll OLED -Modul	Dox -Matrix	72x40 Pixel
Farbe anzeigen	Monochrom oled	Dunkle Raumkontrastverhältnis	2000: 1
Umrissdimension	12,00 x 23,50 x 1,38 mm	Aktiver Bereich (HXV MM)	9.196 x 5.180 mm
Ansprechzeit	10 µs	Schnittstelle	I2C, 15Pin
Dienst fahren	1/40 Pflicht	Helligkeit	430cd/m2
IC -Treiber	SSD1306B	Versorgungsstrom/Spannung	24 mA, 3,0 V
Blickwinkel	>160 Degree	DOT -Tonhöhe	0,128x0.13 (mm)
Betriebstemperatur	-40 °C ~ 70 °C	Lagerung Temperatur	-40 °C ~ 85 °C


- * KWH0042AB01 ist eine passive Matrix kleine OLED -Anzeige.
- * Es besteht aus einem OLED -Panel, Treiber IC, FPC.
- * Es ist 72 x 40 Pixel OLED -Modul.
- * Spezifisches Touch Panel kann entworfen und angepasst werden.
- * ROHS & REACH COMPANTION.
- * Wenn Sie "keinen geeigneten finden können, kontaktieren Sie uns, um eine Empfehlung zu erhalten.

Product Details

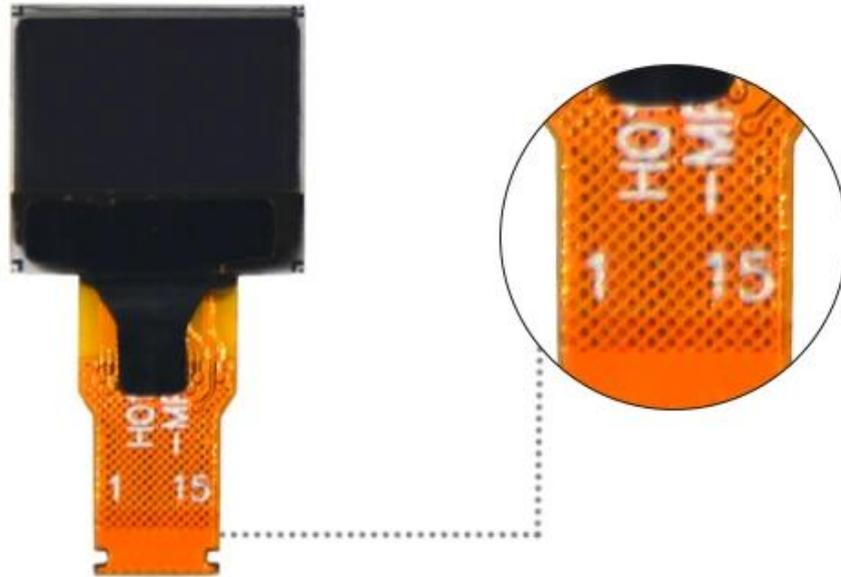

Industrial Excellent Quality

Superior performance in display contrast ratio,
Luminous efficiency, power consumption
And response time. RoHS Compliant and
With strict production quality control.

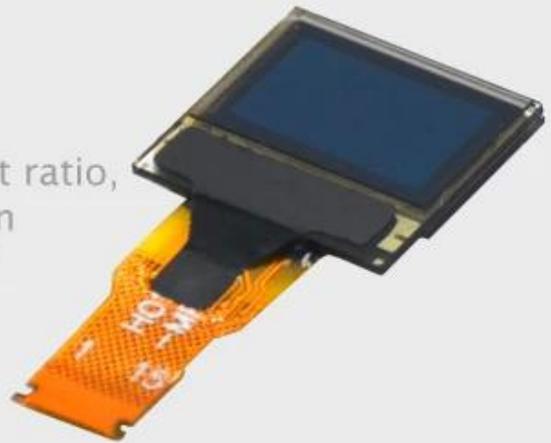

Competitive Price & Customization Solution

Low cost mass production, with attractive price.


Provide you technical service by

Fully experienced engineers.

Support OEM & ODM service.



- * 0.42 Inch 72x40 OLED display
- * White light monochrome PM OLED
- * With 15 pin Soldering FPC
- * With I2C Interface and SSD1306B IC
- * Support OEM & ODM service

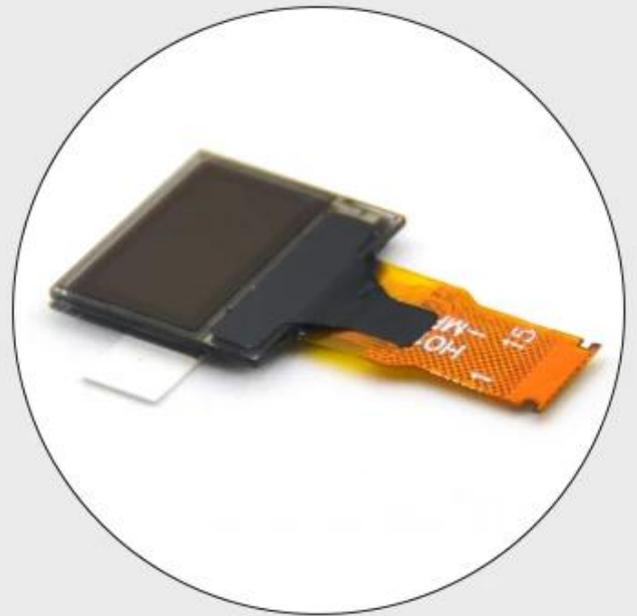

Application

