# 320 * 240□□□TFT LCD FPC□□□□□□□□LCD□□□□□□FPC 3.5□□□□□□□□□□□□□□□□RGB MCU SPI□□□□□□□□

## PRODUCT INFORMATION

TFT LCD DISPLAY

| | | | |
|---|---|---|---|
| **LCD□□□** | 320 * 240□□□TFT LCD FPC□□□□□□□□LCD□□□□□□FPC 3.5□□□□□□□□□□□□□□□□RGB MCU SPI□□□□□□□□ | | |
| **LCD□□□** | 3.5□□□LCD□□□□□ | □□□ | 320□RGB□X240□□□□ |
| □ | 64K / 262K | □□□□□□□ | 300□1 |
| □□□□□□□□□□□□□ | 76.90 x 63.90 x 4.20 mm | □□□□□□□□□**HXV MM**□ | 70.08 x 52.56 mm |
| □□□□□ | 6□ | □□□□□□□□ | 50□□□RGB□SPI□MCU□□□□□□□□ |
| □□□□□□ | □□□□/□□□□□6□□□□LED | □□ | 500cd / m2 |
| **IC**□□□□□ | SSD2119 | □□□□□□□□/□□ | 40mA□3.3V |

* KWH035ST54-F01□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□LCD□□□□
* TFT LCD□□□□□□□□□IC□FPC□□□□□□□□□□□□□□□□□□□□
* 320×240□□□□TFT LCD□□□□□□□□□
*□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
* 250~1500cd / m2□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
*□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
* RoHS□Reach□□□□
*□□□□□□□□□□□□□□□□□□□

# PRODUCT DISPLAY

T F T  L C D  D I S P L A Y

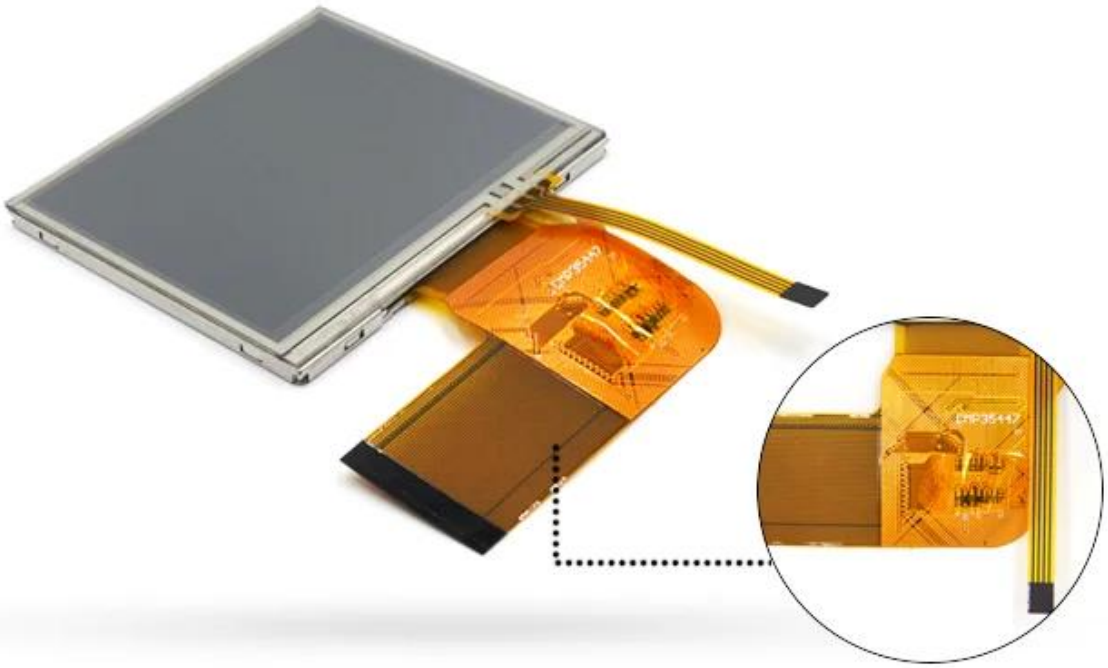

T F T  L C D  D I S P L A Y

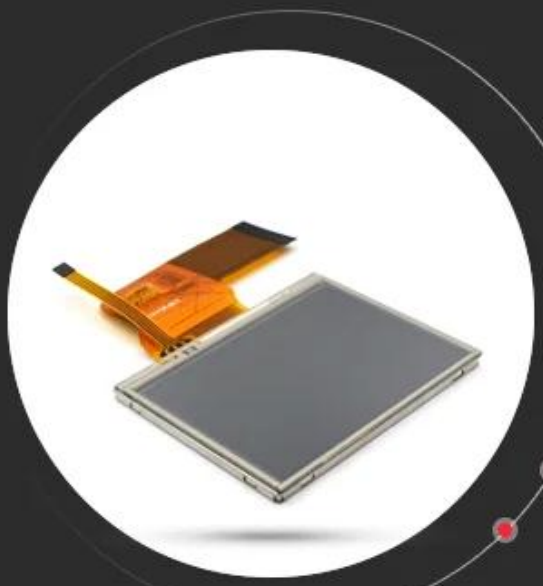

## PRODUCT DETAILS

- High brightness reachs to 500 cd/m²
- With SSD2119 IC & 6 White LED In parallel/serial
- 50 Pin FPC RGB, Serial and MCU Interface
- Good resoltuion with 320x240
- 3.5" TFT LCD Display Module
- Support OEM & ODM Service

# APPLICATION

TFT LCD DISPLAY

01 Civilian equipment

02 Office tools

03 Traffic instrument

04 Mini screen

05 Medical and beauty equipment

06 Smart device

07 Automation

08 Control system