0.68 □□ 96x32 OLED SPI □□ □□□□ OLED □□ SH1106G OLED □□□□□ □□

PRODUCT INFORMATION

OLED LCD DISPLAY

□□	0.68 □□ 96x32 OLED SPI □□ □□□□ OLED □□ SH1106G OLED □□□□□ □□		
□□	0.68 □□ OLED □□	□□ □□□□	96X32
□□□□□ □□	□□	□□ □□□	2000 : 1
□□ □□	19.25 x 20.86 x 1.28mm	□□ □□ **(HxV mm)**	16.30 x 5.42mm
□□ □□	0.15 (W) × 0.15 (H)	□□ □□	I2C, 4 □ SPI, 16 □
□□ □□	-40 ℃ ~ 70 ℃	□□	150cd / m2
IC □□□□	SH1106G	□□□□ □□ □□ / □□	10mA, 3.0V

* KWH0068UX01□ 96x32 □□ □□□□□ □□ OLED □□□□□ □□□□□.
*□ □□□□□ □□□ □□ :
1) □□□□;
2) □□ □□;
3) □□ □□□□ 2000 : 1 □□□□□.
4) □□ / □□ □□
5) □□ □□□□ 160□ □□□□□.
6) □□ □□ □□□ □□ -40 ℃ ~ 85 ℃□□□;
7) □□ □□ □□□ 99.9mW□ □□□□□;
8) □□ □□ □□□ 10μS□ □□□□□.
* 150-1500cd / m2□ □□□ □□ □□□ □□ □□□□□ □□□ □ □□□□.
* □□ □□ □□□ □□ □ □□□ □□□ □ □□□□.
* RoHS □ REACH □□.
* □□□ □□□ □□ □□□ □□ □□□ □□□□ □□□ □□□□□.

PRODUCT DISPLAY

O L E D L C D D I S P L A Y

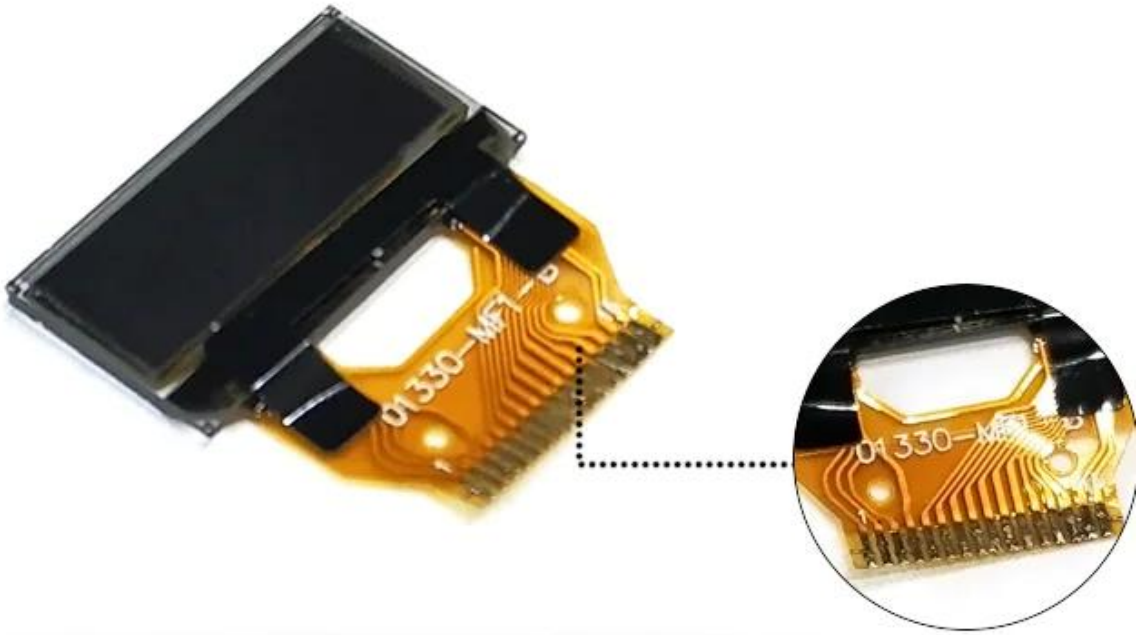

O L E D L C D D I S P L A Y

PRODUCT DETAILS

- High contrast reachs to 2000:1
- With SH1106G IC & White Display Color
- 16 Pin FPC I2C 4-wire SPI Interface
- Good resoltuion with 96x32
- 0.68" Mini Size Monochrome OLED Display Module
- Support OEM & ODM Service

APPLICATION

OLED LCD DISPLAY

01 Civilian equipment

02 Office tools

03 Traffic instrument

04 Mini screen

05 Medical and beauty equipment

06 Smart device

07 Automation

08 Control system