

# 0.68 96x32 OLED SPI OLED SH1106G OLED



## PRODUCT INFORMATION

OLED LCD DISPLAY

0.68 96x32 OLED SPI OLED SH1106G OLED			
0.68 OLED		96X32	
		2000 : 1	
19.25 x 20.86 x 1.28mm	(HxV mm)	16.30 x 5.42mm	
0.15 (W) x 0.15 (H)		I2C, 4 SPI, 16	
-40 °C ~ 70 °C		150cd / m2	
SH1106G		10mA, 3.0V	

\* KWH0068UX01 96x32 OLED

\* :

- 1) ;
- 2) ;
- 3) 2000 : 1 .
- 4) /
- 5) 160 .
- 6) -40 °C ~ 85 °C ;
- 7) 99.9mW ;
- 8) 10µS .

\* 150-1500cd / m2


\* .

\* RoHS REACH .

\* .

# PRODUCT DISPLAY

O L E D   L C D   D I S P L A Y

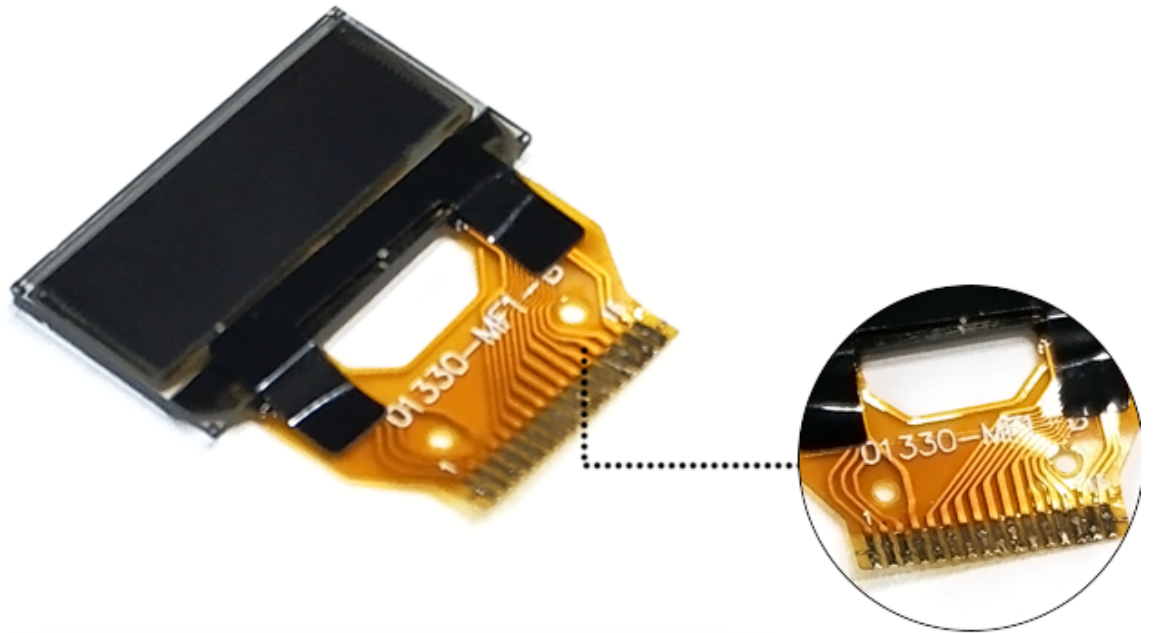

O L E D   L C D   D I S P L A Y

## PRODUCT DETAILS



- High contrast reaches to 2000:1
- With SH1106G IC & White Display Color
- 16 Pin FPC I2C 4-wire SPI Interface
- Good resolution with 96x32
- 0.68" Mini Size Monochrome OLED Display Module
- Support OEM & ODM Service

# APPLICATION

OLED LCD DISPLAY



01 Civilian equipment



02 Office tools



03 Traffic instrument



04 Mini screen



05 Medical and beauty equipment



06 Smart device



07 Automation



08 Control system