# 320 * 240 □□□ TFT LCD FPC □□ □□ LCD □□□□□ FPC 3.5 □□ □□ □□□ □□ RGB MCU SPI □□□□□

## PRODUCT INFORMATION

TFT LCD DISPLAY

| | | | |
|---|---|---|---|
| **LCD □□** | 320 * 240 □□□ TFT LCD FPC □□ □□ LCD □□□□□ FPC 3.5 □□ □□ □□□ □□ RGB MCU SPI □□□□□ | | |
| **LCD □□** | 3.5 □□ LCD □□ | □□ | 320 (RGB) x240 □□□ |
| □□ | 64K / 262K. | □□□ | 300 : 1. |
| □□ □□ | 76.90 x 63.90 x 4.20mm. | □□ □□ **(HXV mm)** | 70.08 x 52.56mm. |
| □□□□ | 6□ □□ | □□ □□ | 50 □, RGB, SPI □ MCU □□□□□ |
| □□□□ | 6 □□ □□ / □□□ □ □□ LED | □□ | 500cd / m2. |
| **IC □□□□** | SSD2119. | □□□□ □□ □□ / □□ | 40mA, 3.3V. |

* KWH035ST54-F01□ □□ □□□ □□ □□ □□□□ □□ □□□□□ (LCD)□□□.
* □□□ TFT LCD □□, □□□□ IC, FPC, □□□□□ □□□□□.
* 320x240 □□□ TFT LCD □□□□□.
* □□ □□ □ □□ □□ □ □□□ □□ □□□□□ □□.
* 250 - 1500cd / m2□ □□ □□ □□□ □□ □□□□□ □□□ □ □□□□.
* □□ □□ □□□ □□□□ □□□ □□ □ □ □□□□.
* RoHS & REACH □□.
* □□□ □□ □□ □ □□□ □□ □□□ □□□□ □□□□□□.

# PRODUCT DISPLAY

T F T  L C D  D I S P L A Y

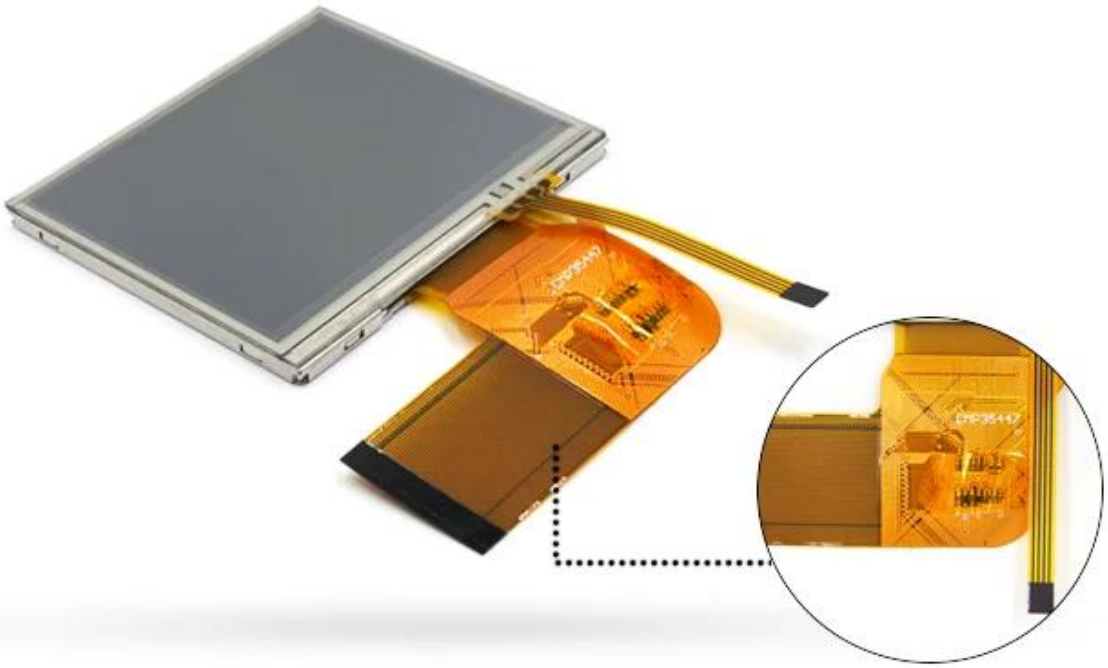

T F T  L C D  D I S P L A Y

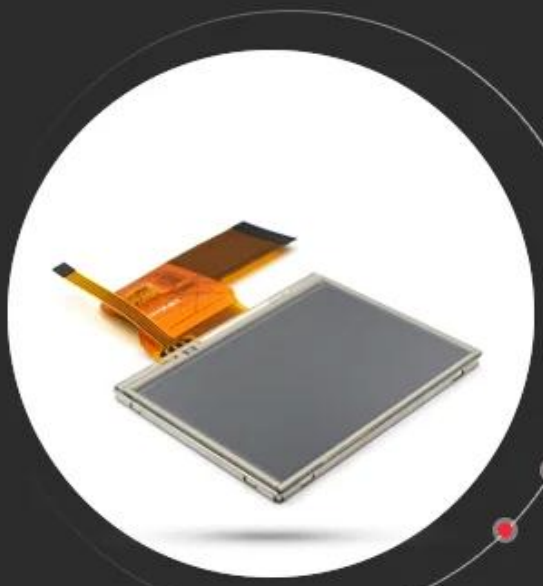

## PRODUCT DETAILS

- High brightness reachs to 500 cd/m²
- With SSD2119 IC & 6 White LED In parallel/serial
- 50 Pin FPC RGB, Serial and MCU Interface
- Good resoltuion with 320x240
- 3.5" TFT LCD Display Module
- Support OEM & ODM Service

# APPLICATION

TFT LCD DISPLAY

01 Civilian equipment

02 Office tools

03 Traffic instrument

04 Mini screen

05 Medical and beauty equipment

06 Smart device

07 Automation

08 Control system