



128x64 SPI LCD 12864 LCD

| | | | |
|-----------------|----------------------------------|----|------------------------------|
| LCD | 128x64 SPI LCD 12864 LCD | | |
| Resolution | 128 x 64 | IC | Fstn, 1/64, 1/9 |
| LCD | Resolution: 128, 64 | IC | ST7565R. |
| Size | 79.0 (w) x 93.0 (h) x 2.8 (t) mm | IC | 74.0min (w) x 48.0min (h) mm |
| Weight | 6g | IC | 0.1t |
| Viewing Angle | 160° | IC | 1/64, 1/9 |
| Operating Temp. | -20 °C ~ + 70 °C | IC | -30 °C ~ + 80 °C |

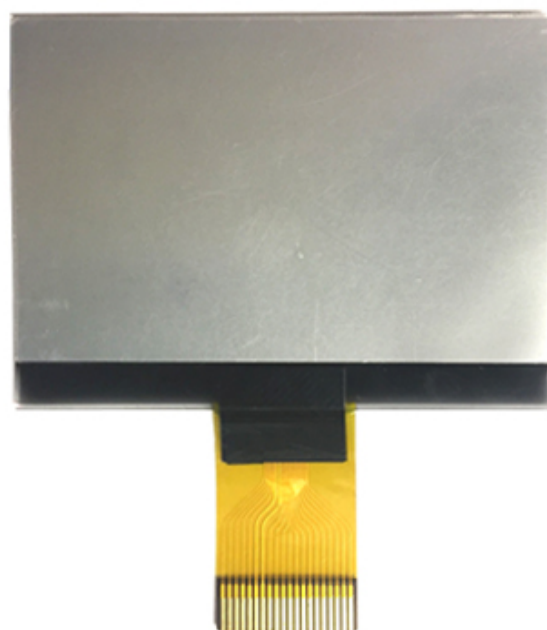

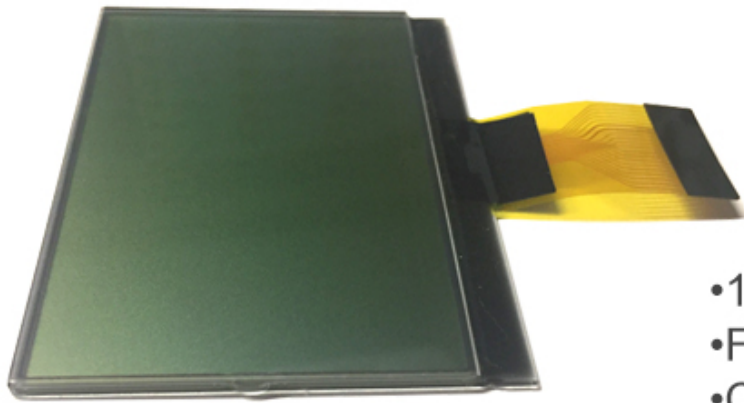

- 128x64
- FSTN
- COG
- Graphic
- Transflective & Positive

