


RGB LCD 128x64 12864



LCD	RGB LCD 128x64 12864		
Resolution	128 x 64	Color	Fstn, RGB
LCD Type	Active Matrix	Pixel Pitch	0.48 (W) x 0.48 (h)
Module Size	77.4 (w) x 52.0 (h) x 7.5 (t) mm	Viewing Angle	66.52min (W) x 33.24min (h) mm
Thickness	6mm	Power Consumption	Low
Backlight	LED	Dot Pitch	1/64, 1/9
Operating Temp.	-20 °C ~ + 70 °C	Storage Temp.	-30 °C ~ + 80 °C

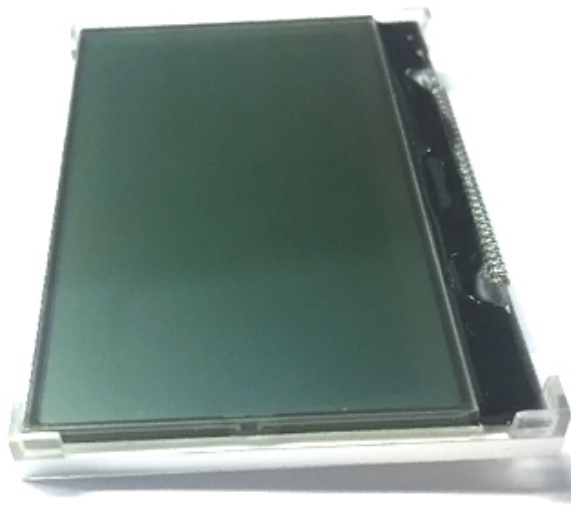

- 128x64
- FSTN
- COG
- Graphic
- Transflective & Positive

