


LCD LCD LCD 16x2 FSTN LCD

LCD	LCD LCD 16x2 FSTN LCD		
	16 character * 2		Fstn, , ,
LCD	: :		COB.
	80.0 (w) x36.0 (h) x 13.1 (t) mm		64.5min (w) x15.8min (h) mm
IC.	ST7066U-0A.		16
	6		4 8 MPU.
			1/16 , 1/5
	-20 °C ~ + 70 °C		-30 °C ~ + 80 °C



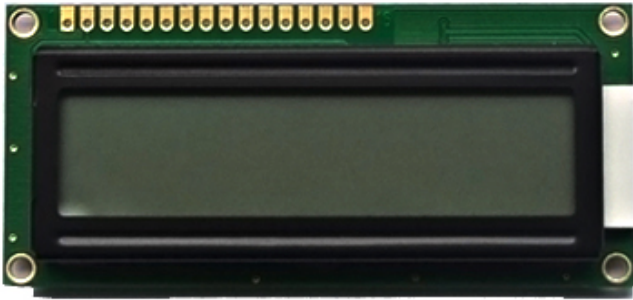

- 16x2
 - FSTN
 - COB
 - Character
- Transflective & Positive

