

Módulo OLED de 72x40 de 0,42 polegadas de 72 polegadas com SSD1306B Driver IC IC

Small OLED Display

Support OEM & ODM Service

- * Low power consumption reaches to 2uA-20uA depending on the size;
- * Thinner, lighter and durable;
- * Full viewing angle;
- * High contrast ratio is up to 2000:1;
- * With fast response time down to 10μs;
- * Best driving voltage control is as low as 3-9V.




Specification

Nome	Módulo OLED de 72x40 de 0,42 polegadas de 72 polegadas com SSD1306b Driver IC IC		
Tamanho do módulo	Módulo OLED de 0,42 polegadas	Matriz Dox	72x40 pixels
Exibir cor	Monocromático OLED	Taxa de contraste da sala escura	2000: 1
Dimensão de contorno	12,00 x 23,50 x 1,38 mm	Área ativa (HXV MM)	9.196 x 5.180mm
Tempo de resposta	10 μs	Interface	I2C, 15pin
Dirigir de serviço	1/40 de serviço	Brilho	430CD/M2
Driver IC	SSD1306B	Fornecimento de corrente/tensão	24MA, 3.0V
Ângulo de visualização	>160 Degree	Tom de ponto	0,128x0.13 (mm)
Temperatura de operação	-40 °C ~ 70 °C	Armazenar Temperatura	-40 °C ~ 85 °C


- * KWH0042AB01 é uma tela OLED de matriz passiva.
- * É composto por um painel OLED, Driver IC, FPC.
- * É um módulo OLED de 72x40 pixels.
- * O painel de toque específico pode ser projetado e personalizado.
- * Rohs & alcance compatível.
- * Se você não conseguir encontrar um adequado, entre em contato conosco para obter uma recomendação.

Product Details

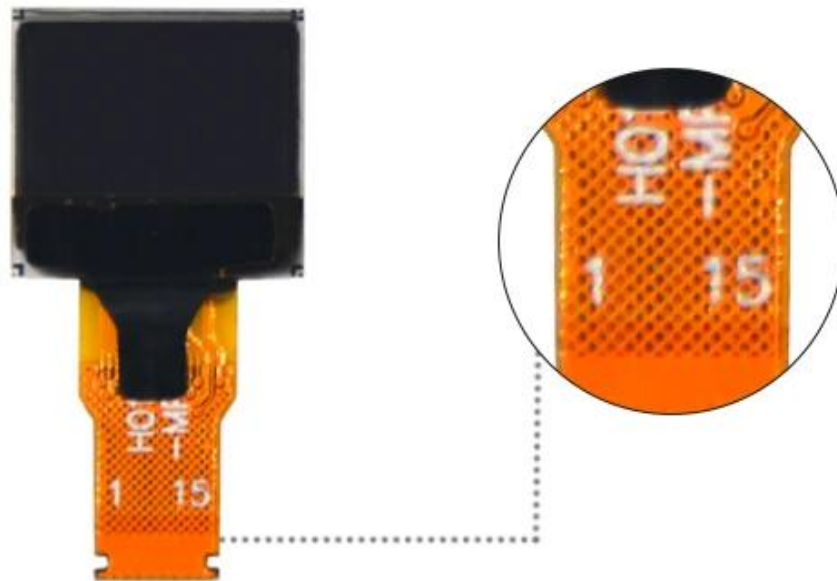

Industrial Excellent Quality

Superior performance in display contrast ratio,
Luminous efficiency, power consumption
And response time. RoHS Compliant and
With strict production quality control.

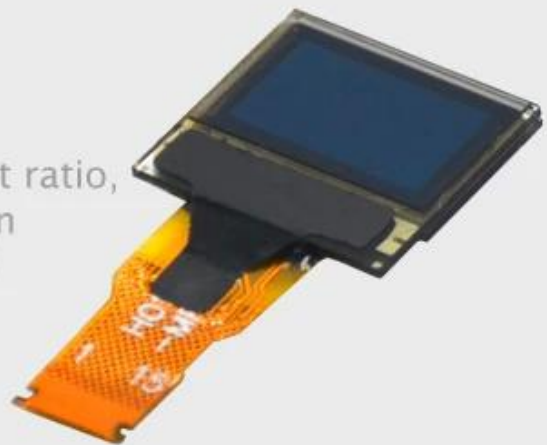

Competitive Price & Customization Solution

Low cost mass production, with attractive price.


Provide you technical service by

Fully experienced engineers.

Support OEM & ODM service.



- * 0.42 Inch 72x40 OLED display
- * White light monochrome PM OLED
- * With 15 pin Soldering FPC
- * With I2C Interface and SSD1306B IC
- * Support OEM & ODM service

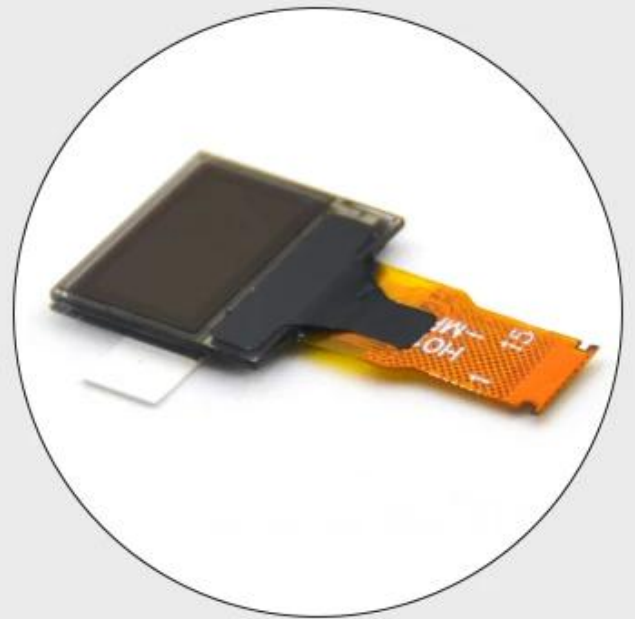

Application

