

130DB Loud Alarm

The maximum alarm volume is 130DB, the volume can be adjusted, and the red and blue light flashes alternately when the alarm is generated



Low Power Consumption

Ultra-low power consumption, durable battery life, low power when the APP push low power reminder, please replace the battery in time, use AAA*2 battery (shipped without battery)



Deploy & Withdraw Defenses

Click layout, **double click** to remove the defense, **long press for 3 seconds** to silence the sound, **long press for 8 seconds** to reset the device.



Two Monitoring Modes Real Time Monitoring Reminder


Real time monitoring of water leakage alarm/water level alarm



Water leakage detection



Low water level detection

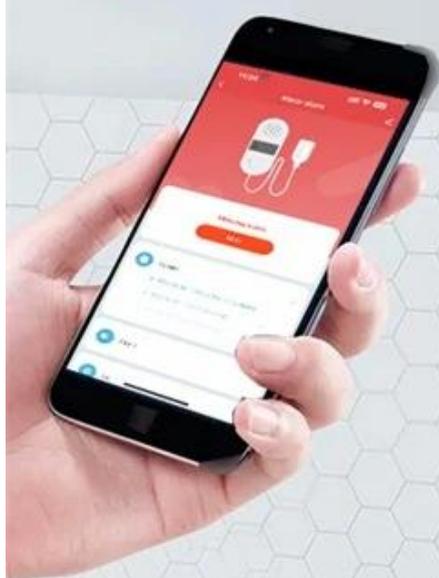

APP Remote Control

No matter what city, country, or place you are in, your smartphone can receive a push of information and check the status



Voice Control

Through **Alexa** and **Google Assistant**, the door opening and closing status can be easily understood


Alexa, what's the status of water leak sensor?

Water leak sensor detects no leaks in the Bathroom.



WiFi version: 2.4G WiFi is required

ZigBee version: Connect to the ZigBee gateway

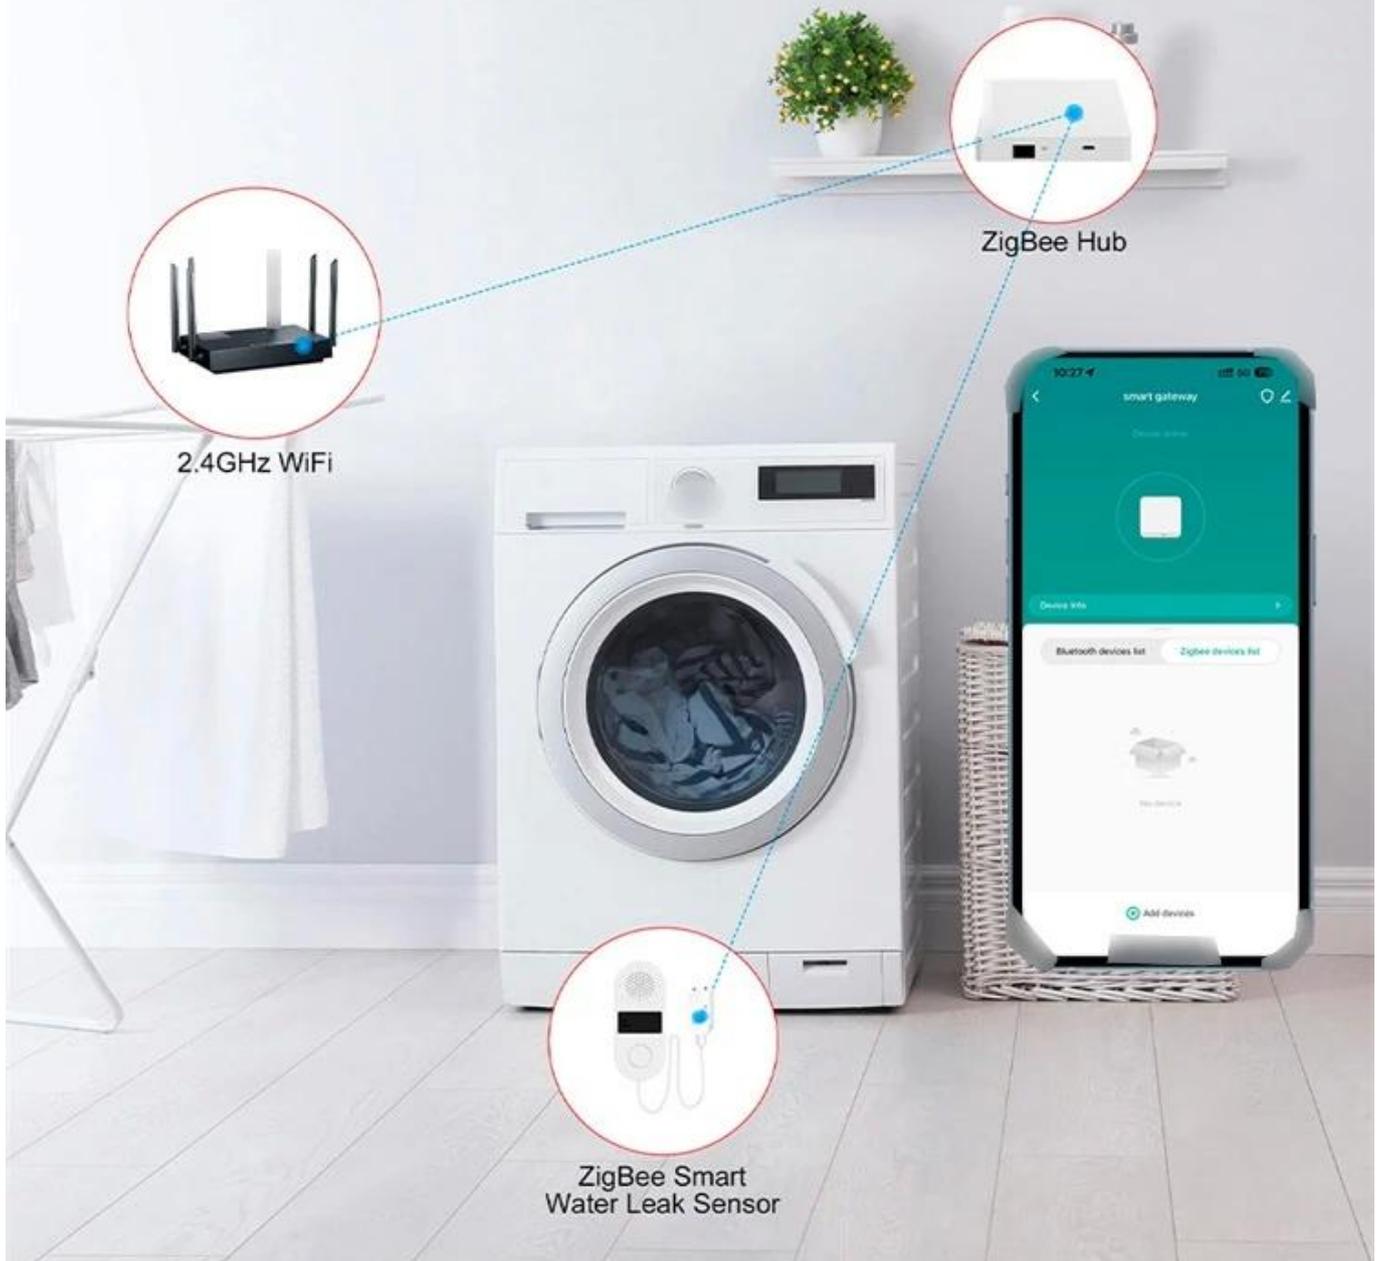



Product Specification

INTELLIGENT SECURITY PROTECTION

Wireless Type :	2.4GWi-Fi / Zigbee3.0
Alarm volume:	130DB
Standby current:	<10uA
Battery:	AAA*2
Operating Temperature:	-10 Celsius - 40 Celsius (14degF-104degF)
Operating Humidity:	20% - 85%
Storage Temperature:	-10 Celsius -60 Celsius (14degF-140degF)
Storage Humidity:	0% - 90%
Standby time:	6 - 12 months